

- SEM 710 PLUS** 10" 2-way Stage/Floor Speaker  
**SEM 712 PLUS** 12" 2-way Stage/Floor Speaker  
**SEM 715 PLUS** 15" 2-way Stage/Floor Speaker



## FEATURES:

- ▶ 2-way enclosure
- ▶ Sensitivity (1 W @ 1 meter): 95 – 98 dB (depends on model)
- ▶ 10", 12" or 15" heavy-duty woofer and 1" tweeter
- ▶ 8 Ohm nominal load
- ▶ 35mm stand adaptor built in
- ▶ Dual 1/4" phone jacks
- ▶ Enclosure carpeted for increased protection


---

The SEM Plus 2-way Stage / Floor Speakers give you more power for your money. These starter units feature 10", 12" and 15" heavy duty woofers matched with a piezo tweeter. The units feature power handling up to 170 Watts (RMS) or 340 Watts (Program), making the SEM Plus series the perfect solution to a cost-efficient speaker set up.

## SPECIFICATIONS

	SEM 710 Plus	SEM 712 Plus	SEM 715 Plus
Type	2-way Stage / Floor Monitor		
Power Handling (RMS / Program)	150W / 300W	170W / 340W	170W / 340W
Frequency Response	65 - 20 kHz	60 - 20 kHz	50 - 20 kHz
Sensitivity @ 1 W / 1 M (+/- dB)	96 dB	95 dB	98 dB
Built-in Crossover	Yes	Yes	Yes
Dispersion Angle (Degrees)	90 x 40	90 x 40	90 x 40
Box	Dual Angled / Black Carpet		
Handles	2	2	2
Stand Socket	35 mm	35 mm	35 mm
Nominal Impedance	8 ohms	8 ohms	8 ohms
Connector	2 x 1/4" phone jacks	2 x 1/4" phone jacks	2 x 1/4" phone jacks
Dimensions (HxWxD)	491 x 351 x 314 mm (19.3" x 13.8" x 12.4")	540 x 376 x 356 mm (21.3" x 14.8" x 14")	679 x 476 x 388 mm (26.7" x 18.7" x 15.3")
Net Weight	11 kg (24 lbs)	13 kg (29 lbs)	19 kg (42 lbs)

### BACK PANEL

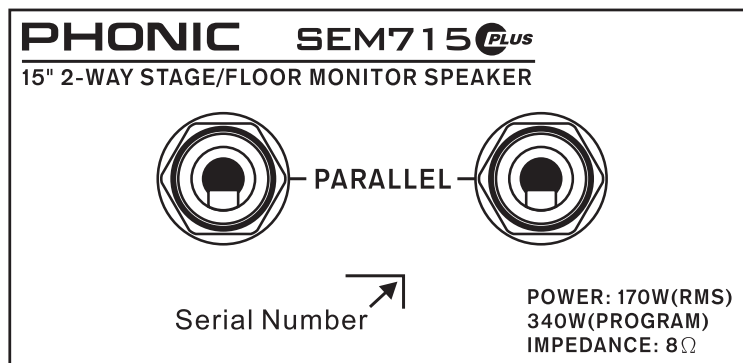

V1.1 01/28/2008

Information in this document is subject to change without notice